

LED WORK LIGHT

IP65

FP-50RT-L SERIES



• FP-50RTL-L

• FP-50RTM-L

• FP-50RTS-L

• FP-50-1/2RTM-L

• FP-50RS-L

• FP-50-1/2RM-L





• FP-50RM-L

• FP-50RL-L

• FP-50FT-L

• FP-50F-L

DIMENSION DRAWINGS

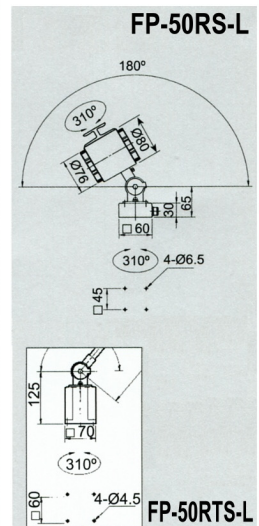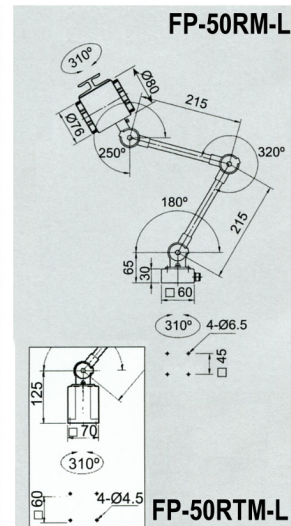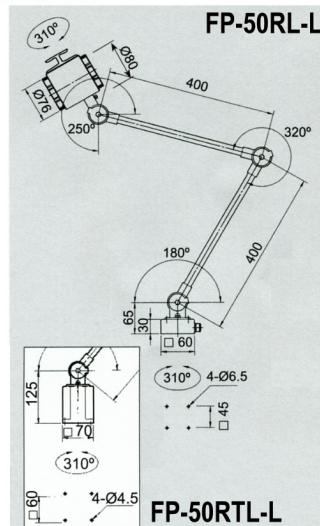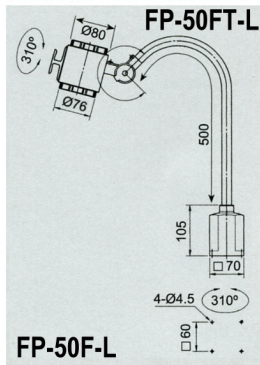

LIGHT SWITCH


The light switch is standard.
Less switch is available
upon request.

Feature

- FP-50FT-L /50RTL-L /50RTM-L /50RTS-L accommodates AC 100V~240V with 1.8 meters of cord and plug.
- FP-50F-L /50RL-L /50RM-L /50RS-L accommodates AC/DC 24V with 1.8 meters of cord without plug.
- Consists of 3 LED bulbs.(1W)

- Well prevention for water, lubricants, coolants, dust and other liquids.
- Double shades design permits fast heat dissipation.
- Articulated arm provides vibration resistance.

60mm SQUARE BASE (OPTIONAL) (for AC/DC 24V)

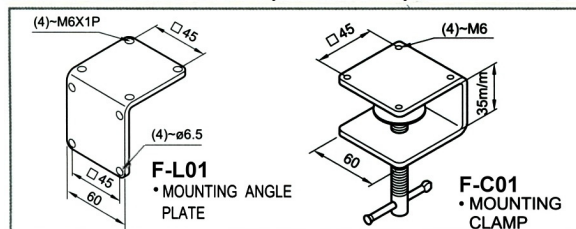

70mm SQUARE BASE (OPTIONAL) (for AC 100V~240V)

