LED WORK LIGHT

FP-55NT-L SERIES


LED driver is built in the base

Equipped with a LED driver for directly connecting to voltage of AC power. (100V~240V) (50Hz/60Hz) with 1.8 meters of cord and plug. (For high voltage)


Feature

- Various lighting angles to select 25°, 60° and 80°.
 Standard lighting angle is 60°.
- Power of each LED bulb is 2W x 6 pcs.
- · Reinforced lense for high crack-resistance.
- · Well prevention for explosion, dust, coolant and lubricant.
- Long service life up to 40,000 lighting hours.
- Suitable for temperature range -30° ~ +50°.
- Free of infrared ray and ultraviolet ray radiation.


OPTION



DIMENSION DRAWINGS












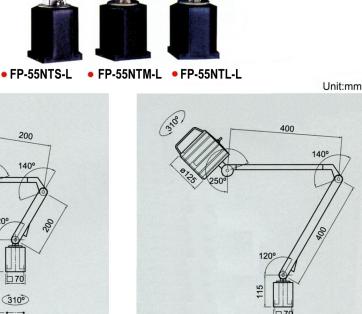

FP-55NTL-L

LONG ARM

