

FP-55RNT-L SERIES


LED driver is built in the base

Equipped with a LED driver for directly connecting to voltage of AC power. (100V~240V) (50Hz/60Hz) with 1.8 meters of cord and plug. (For high voltage)

Feature

- Various lighting angles to select 25°, 60° and 80°. Standard lighting angle is 60°.
- Power of each LED bulb is 2W x 6 pcs.
- Reinforced lense for high crack-resistance.
- Well prevention for explosion, dust, coolant and lubricant.
- Long service life up to 40,000 lighting hours.
- Applicable for semiconductor manufacturing equipment and clean room.
- Free of infrared ray and ultraviolet ray radiation.

OPTION

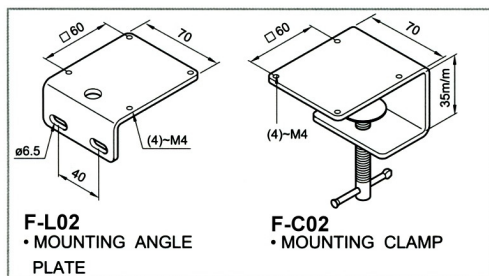

• FP-55NTS-L



• FP-55RNTM-L

• FP-55RNTL-L

Unit:mm

DIMENSION DRAWINGS

