

FP-WN-L SERIES


Feature

- Equipped with a LED driver for directly connecting to voltage of AC power. (100V~240V) (50Hz/60Hz) with plug. (For high voltage)
- Low voltage power AC24V or DC24V is available. Also, special voltage can be specified.
- LED driver can be externally mounted for increasing LED bulbs.
- Reinforced lense for high crack-resistance.
- Reinforced lense provides clear (transparent) or sand blasted (foggy) surface to choose from.
- Well prevention for explosion, dust, coolant and lubricants.
- Furnished with 1.8 meters of cord without plug. (For low voltage)
- Long service life up to 40,000 lighting hours.
- Applicable for semiconductor manufacturing equipment and clean room.
- Suitable for temperature range -30° ~ +60°
- Free of infrared ray and ultraviolet ray radiation.
- Anti-irritation lens grid is fitted as a standard accessory.
- Glass light tube is standard.
- PC or acrylic light tube is optional.



BUILT - IN BALLAST SERIES:

MODEL	WATT	Illuminance	A	C	D
FP15-WN082DB-L	14W x 1	1.0M / 530 lx	386 m/m	405 m/m	423 m/m
FP15-WN18DB-L	14W x 1	1.0M / 530 lx	484 m/m	503 m/m	521 m/m
FP15-WN24DB-L	14W x 1	1.0M / 530 lx	583 m/m	602 m/m	620 m/m
FP20-WN24DB-L	20W x 1	1.2M / 520 lx	583 m/m	602 m/m	620 m/m
FP20-WN36DB-L	20W x 1	1.2M / 520 lx	675 m/m	697 m/m	713 m/m
FP24-WN36DB-L	24W x 1	1.4M / 510 lx	675 m/m	697 m/m	713 m/m
FP30-WN36DB-L	14W x 2	1.4M / 530 lx	675 m/m	697 m/m	713 m/m
FP30-WN142DB-L	14W x 2	1.4M / 530 lx	664 m/m	683 m/m	701 m/m
FP14-WN20DB-L	14W x 1	0.9M / 550 lx	822 m/m	841 m/m	859 m/m
FP20-WN20DB-L	20W x 1	1.1M / 560 lx	822 m/m	841 m/m	859 m/m
FP30-WN20DB-L	14W x 2	1.4M / 530 lx	822 m/m	841 m/m	859 m/m
FP45-WN212DB-L	14W x 3	1.8M / 526 lx	964 m/m	983 m/m	1001 m/m
FP30-WN80DB-L	14W x 2	1.4M / 530 lx	878 m/m	897 m/m	915 m/m
FP24-WN40DB-L	12W x 2	1.3M / 520 lx	1492 m/m	1511 m/m	1529 m/m
FP30-WN40DB-L	32W	1.5M / 510 lx	1492 m/m	1511 m/m	1529 m/m

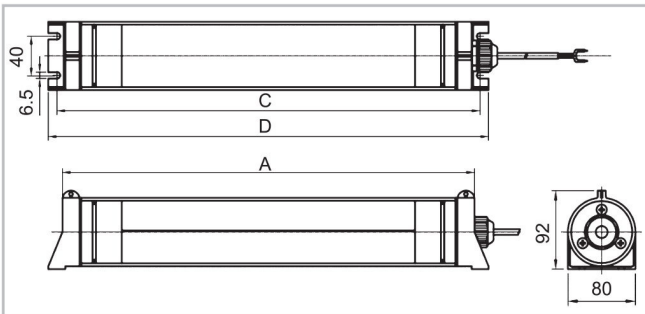

STANDARD : CHOOSE EITHER ONE ONLY

