

LED MACHINE STRIP LIGHT

IP69K

FPP-28-L SERIES

FPP-281D-L, FPP-282D-L, FPP-283D-L, FPP-284D-L

120° Lighting Angle.
Low Voltage DC24V Only.



FPP Series

- Available to equip with an externally mounted LED driver for connecting to 100V-240V or AC 24V (OPTIONAL)
- Equipped with power wires protection tube connector.
- Modern structure. Low power consumption only requires 14 watt.
- Color temperature 5600K~6000K.

Feature


- Reinforced lens for high crack-resistance.
- Well prevention for explosion, dust, coolant and lubricants.
- Furnished with 1.8 meters of cord without plug. (For low voltage)

Model Identification


F P P - 2 8 1 D E - L

Plane
281 14Watt 2 sets
282 14Watt 4 sets
283 14Watt 6 sets
284 14Watt 8 sets
Built-in LED Driver (DC24V)
Embedded Type
LED Light


DIMENSIONS OF LED LIGHT

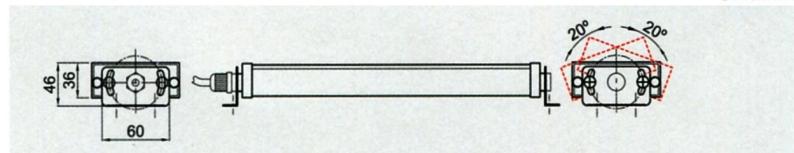

FPP-281D-L

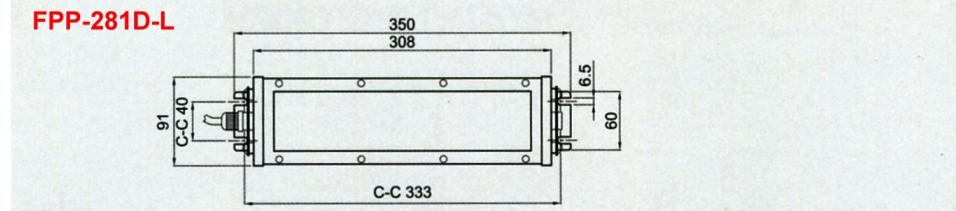

FPP-282D-L

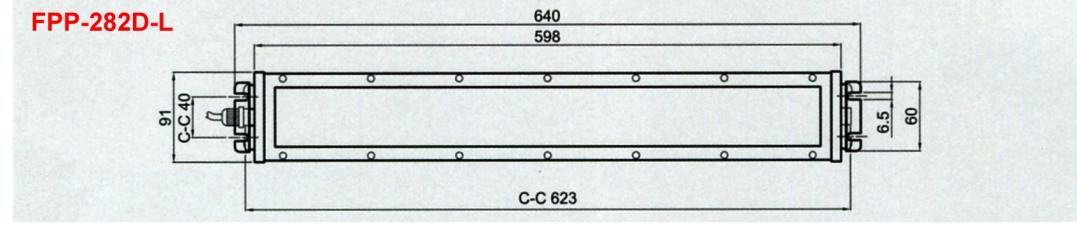


1/4" NYLON GUARD (opt.)




power wires protection tube

FPP-283D-L

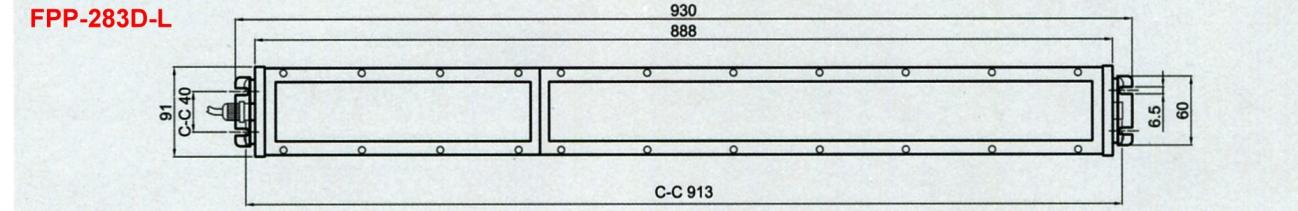


FPP-284D-L

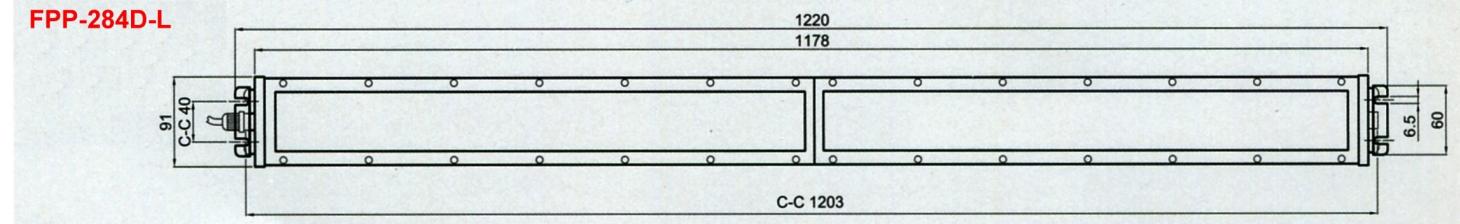


FPP-281D-L
LED

28 Watt 120°

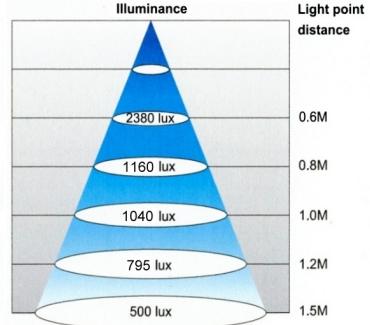


FPP-282D-L
LED

56 Watt 120°

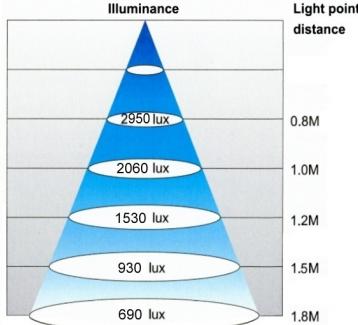


FPP-283D-L
LED

84 Watt 120°

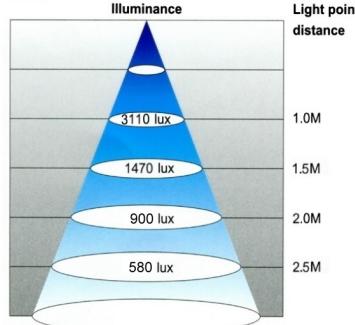

FPP-284D-L
LED

112 Watt 120°

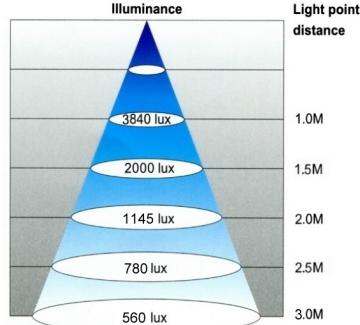

FPP-281DE-L, FPP-282DE-L

FPP Series


- An embedded type LED light.
- Fixed light angle.
- 120° lighting angle.
- Power wires come through bottom.



DIMENSIONS OF LED LIGHT

Unit:mm


FPP-281DE-L

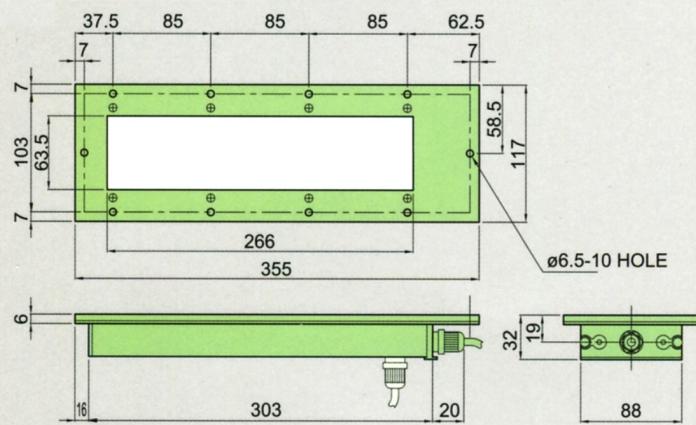


MOUNTING DIMENSIONS

Unit:mm

FPP-281DE-L

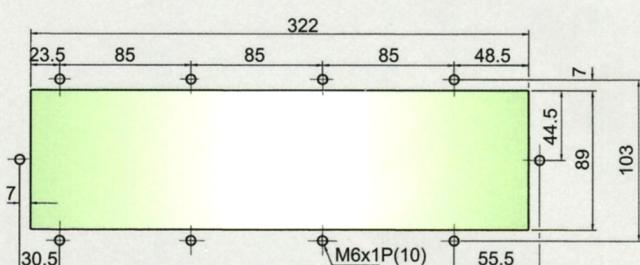

FPP-282DE-L

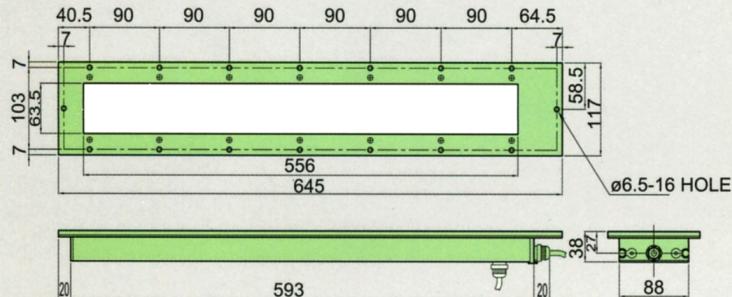

FPP-282DE-L

